

Multi-Turn Wirewound Potentiometer

Series MT12C



Standard Model Nos.

MT12C-5 (5-turn)
MT12C-10 (10-turn)

General Specifications (Note 1)

Standard Resistance

Range: 100, 200, 500, 1k, 2k, 5k, 10k, 20k Ω

Max. Practical

Resistance Value: 50k Ω (10-turn)

Total Resistance

Tolerance: Standard Class $\pm 3\%$
Precision Class $\pm 1\%$

Independent Linearity

Tolerance:

	5-turn	10-turn
Standard Class	$\pm 0.35\%$	$\pm 0.25\%$
Precision Class	$\pm 0.2\%$	$\pm 0.1\%$
	(< 5k Ω) ($\pm 0.25\%$)	($\pm 0.15\%$)

Power Rating: 0.75W (5-turn)

1.5W (10-turn)

Noise: Within 100 Ω E.N.R.

Electrical Travel: $360^\circ \times n \pm 5^\circ$ (n: No. of turns)

Mechanical Travel: $360^\circ \times n +15^\circ -0^\circ$ (n: No. of turns)

Rotational Life: 500,000 (5-turn)
1,000,000 (10-turn)

Protection Grade: IP40 (IP54 optional)

Operating Temp.: $-55^\circ\text{C} \dots +105^\circ\text{C}$

Insulation Resistance: Over 1000 M Ω at 500V.D.C.

Dielectric Strength: 1 minute at 1000V.A.C.

Starting Torque: Within 3mN \cdot m (30gf \cdot cm)


Stopper Strength: Approx. 0.15N \cdot m (1.5kgf \cdot cm)

Resist. Temperature Coefficient of Wire: $\pm 20\text{p.p.m./}^\circ\text{C}$


Vibration: 15G / 10Hz to 2,000Hz 12 hours

Shock: 50G / 11ms 18 times

Mass: Approx. 10g (5 & 10-turn)

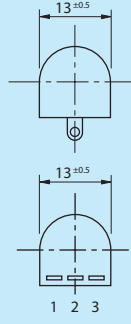

rear lug terminals (optional)

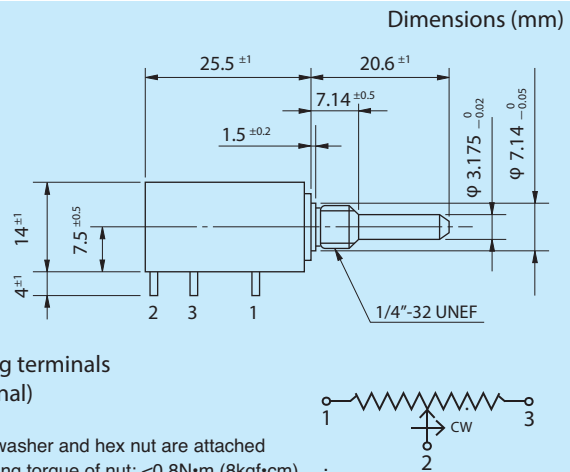

Resolution Chart (%)

Resist. Value (Ω)	100	200	500	1k	2k	5k	10k	20k	50k	
MT12C-5	0.11	0.08	0.08	0.07	0.056	0.042	0.032	0.026	0.018	
MT12C-10	0.06	0.05	0.04	0.04	0.033	0.024	0.021	0.016	0.012	
Resist. Wire Used	Cu-Ni System			Ni-Cr System						

Special Specifications Available

3-turn type (MT12C-3, [rotational life of 300,000]), Shaft with front and rear extension (Rear shaft with 0.8mm dia. and 10mm length), Special machining on shaft, Rear terminals, Sealed housing with o-ring shaft seal for IP54 rating (torque increases).

Note 1: Customers should test and verify device performance in any given application. General specifications are measured at temperatures of $+15^\circ\text{C} \sim +35^\circ\text{C}$. Specifications subject to change without notice.