

NP24HS Series

Single Turn Hollow Shaft Potentiometer (Conductive Plastic)



- Direct to shaft mounting, no couplings.
- Low profile
- 5,000,000 turns life
- 340° measuring angle or to your specifications
- Mounting bracket included

The series NP24HS is a low profile hollow shaft precision potentiometer. 340° electrical angle or can be produced to your specific angle requirements. Omni-mount bracket included in delivery.

Electrical Data

Resistance values	1k, 2k, 5k, 10k, 20k, 50k, 100k
Resistance tolerance	20% (Optional; 10%)
Effective electrical angle of rotation	340° ±5°
Independent linearity	±2.0% (optional; 1% or 0.5%)
Resolution	Essentially infinite
Temperature coefficient of resistance	±400 ppm/deg C
Power rating @ 70°C	0.5 watt
Insulation resistance	500 Mohms @ 500 VDC
Dielectric strength	500 VAC @ 50 Hz
Max. wiper current	1 mA

Mechanical and Environmental Data

Mechanical angle of rotation	360° (continuous)
Starting torque	7 Nmm
Operating torque	5 Nmm
Operating temperature	-40°C...+105°C
Rotational life	5,000,000 shaft revolutions
Bearing	Sleeve, brass on one end
Protection class	IP40
Housing material	Engineered plastic
Shaft (hollow) material	Engineered plastic
Omni-mount material	Engineered plastic


Note: Customers should test and verify device performance in any given application. Shaft modifications are possible, please consult us. Specifications subject to change without notice.

NP24HS Series

Single Turn Hollow Shaft Potentiometer (Conductive Plastic)

Dimensions (mm)

Potentiometer Only (optional)

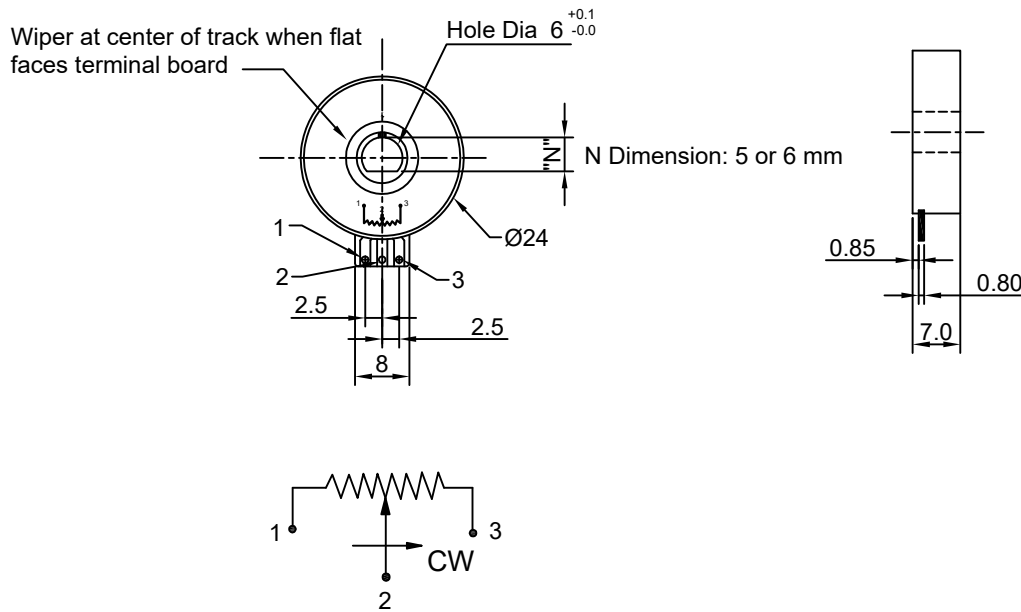

Omni-mount Dimensions (mm)

Potentiometer with Omni-mount
(omni-mount included with delivery)

