


SLPKS

Linear Potentiometer 10 - 100 mm

Slim Body Series




External Spring Return, Rod On The Both Sides

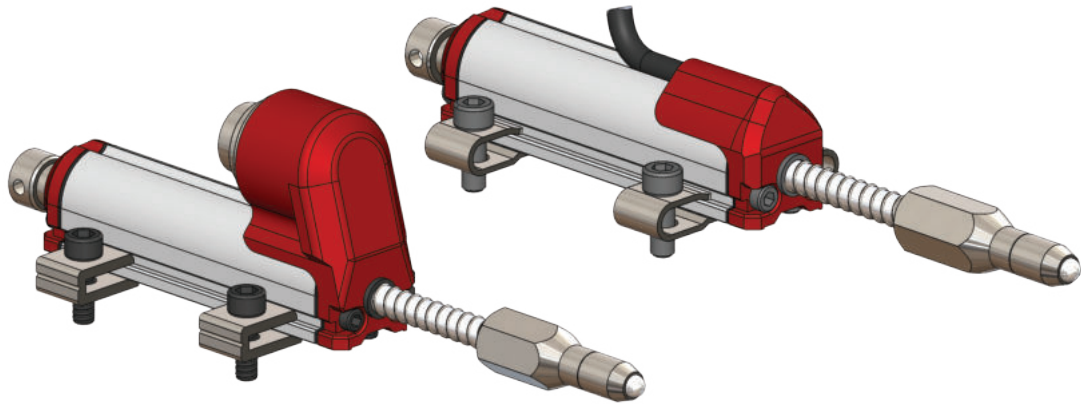


1. TECHNICAL SPECIFICATIONS

Measurement stroke	10 - 100 mm
Repeatability	< 0.01 mm
Resolution	Infinite
Permissible applied voltage	28 VDC max.
Electrical connections	Cable output (standard) CN5B: M16, 5 pin connector output (optional)
Displacement speed	< 5 m/s
Mechanical life	100 million movement
Protection level	IP 40
Resistance	2 kOhm: 10 - 50 mm 5 kOhm: 75 - 100 mm
Resistance tolerance	± %20
Load resistance	100 kOhm min.
Recommended wiper current	<1 µA
Linearity	A: ±%0.5 (≤75 mm) B: ±%0.2 (100 mm)
Case dimensions	Ø18 mm
Case material	Anodized aluminium
Caps material	ABS Plastic
Rod material	Stainless steel
Rod diameter	Ø5 mm
Mechanical fixing	Variable brackets
Operating temperature	-20°C ... +80°C
Storage temperature	-30°C ... +90°C

3.CABLE, CONNECTOR AND BRACKET

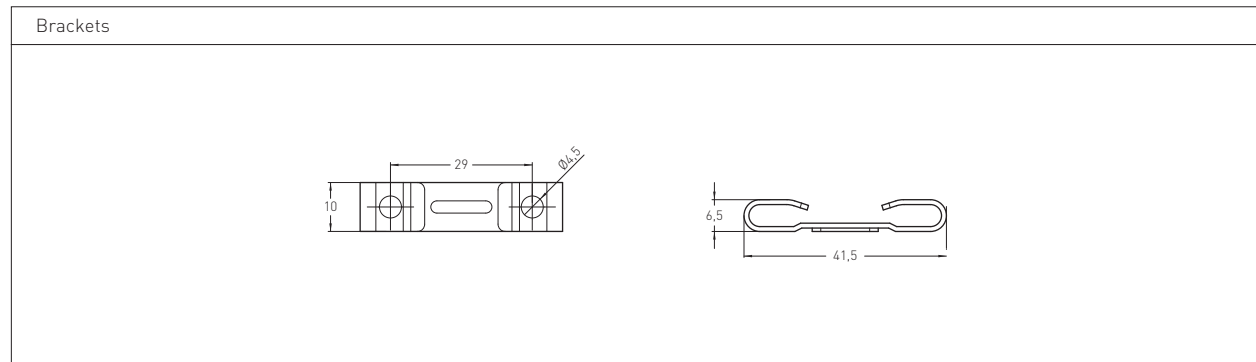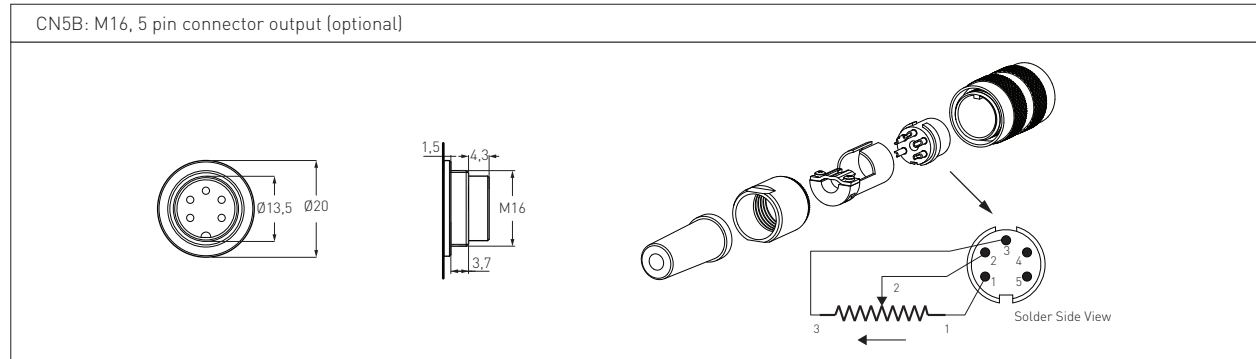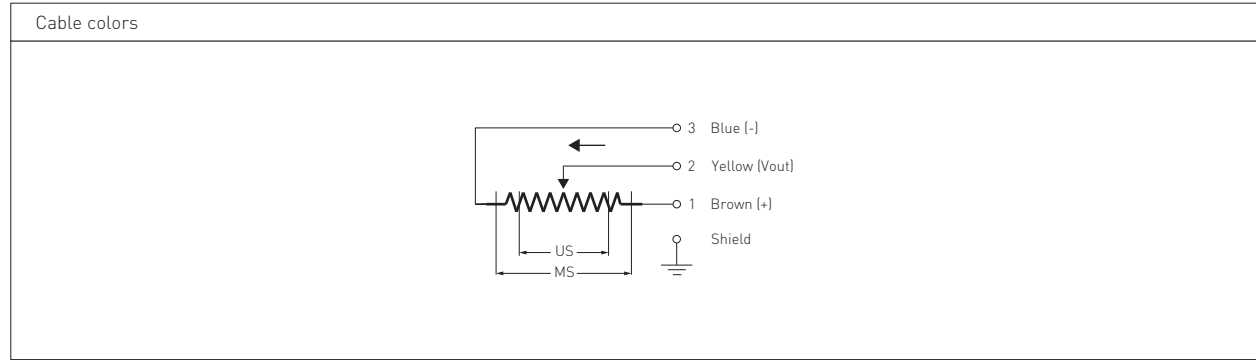

4.ASSEMBLY

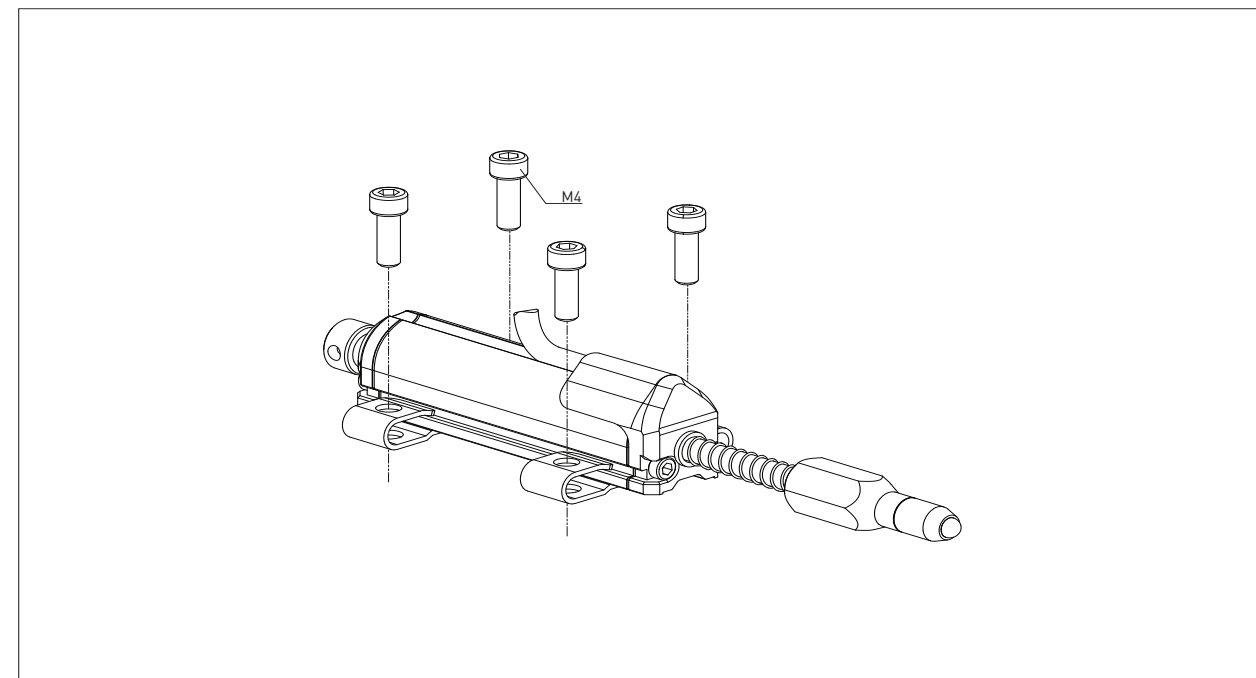

5. ORDERING PROCEDURE

1	Model
	SLPKS: Linear Potentiometer Slim Body Series, External Spring Return
2	Measurement stroke
	10 - 100 mm
3	Linearity
	A: $\pm 0.5\%$ (≤ 75 mm) B: $\pm 0.2\%$ (100 mm)
4	Resistance (kOhm)
	2K: 5 kOhm (10 - 50 mm) 5K: 10 kOhm (75 - 100 mm)
5	Connector / Cable
	1M: 1 meter cable (standard) CN5B: M16, 5 pin connector (optional)

For example:

SLPKS	150	C	5K	1M
1	2	3	4	5